



## TECHNICAL DATA

# Fluke 15B MAX Economical Digital Multimeter



## Key features


- Audible and visual alarm for incorrect connections
- Test leads with fine tips for circuit board testing
- Simple interface to wake meter from sleep mode by activating any buttons
- Voltage: 6000-count reading
- Capacitance range: 2000uF
- Safety rating: CATIII 600V

## Product overview: Fluke 15B MAX Economical Digital Multimeter

Fluke 15B MAX Inherits and continues the classic design of 15B+, with further improved functions: Input Alert Alarm, Simple interface to wake meter from sleep mode by activating any buttons, test leads with fine probes to help electricians and electronic R&D personnel make accurate measurements.



Audible and visual alarm for incorrect connections

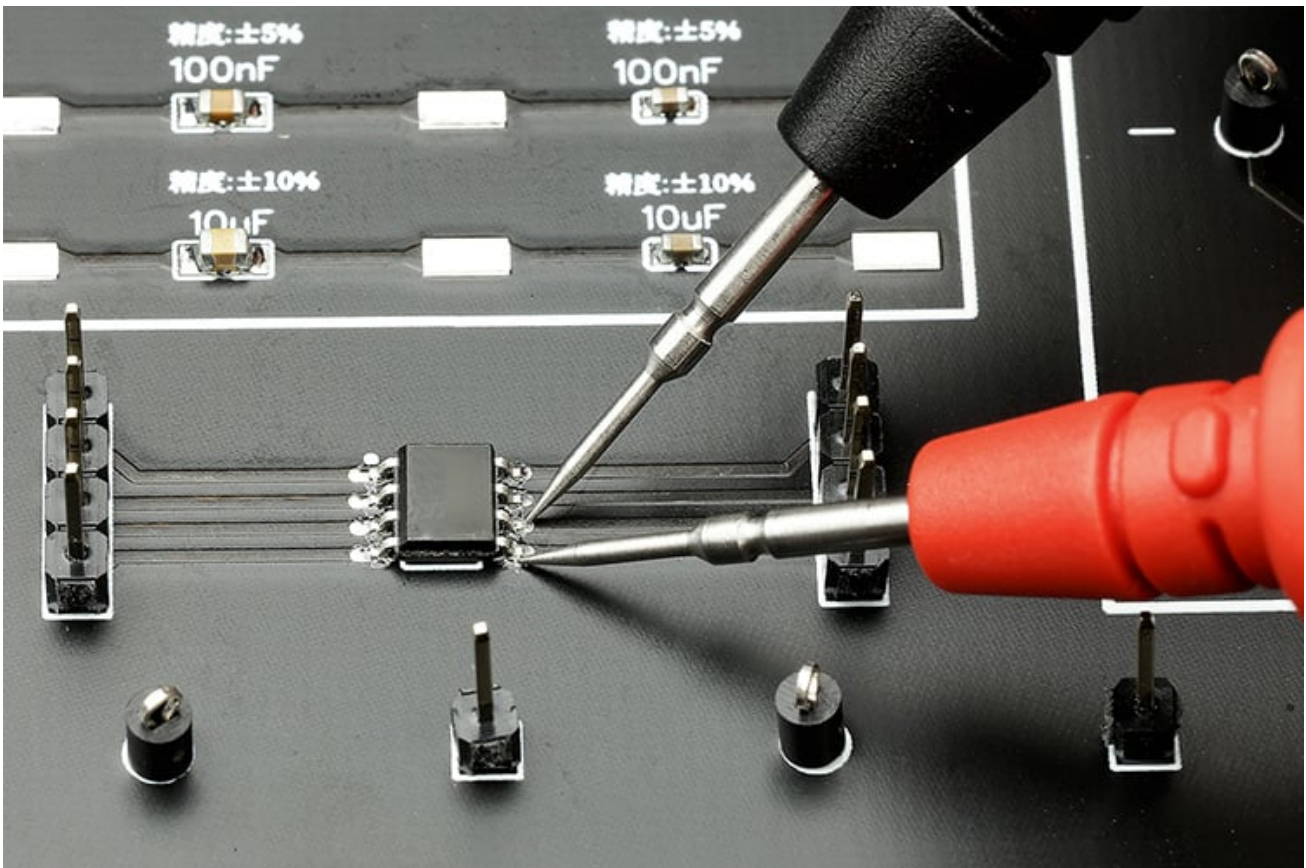

Test leads with fines tips for circuit board testing



## Specifications: Fluke 15B MAX Economical Digital Multimeter



## Ordering information



### Fluke 15B MAX-01 Digital Multimeter

---

Includes:

- TL75 Test Leads with 2 Protective Caps
  - 2 AA Batteries
- 

### Fluke 15B MAX-02 Digital Multimeter

---

Includes:

- TL31 Extra-Slim Test Leads with 2 Protective Caps
  - 2 AA Batteries
  - Safety information
- 

### Fluke 15B MAX KIT Digital Multimeter

---

Includes:

- TL75 Test Leads with 2 Protective Caps
  - TL31 Extra-Slim Test Leads with 2 Protective Caps
  - 2 AA Batteries
  - Safety information
-



**Fluke.** *Keeping your world up and running.®*

**Fluke Corporation**

PO Box 9090, Everett, WA 98206 U.S.A.

**For more information call:**

In the U.S.A. (800) 443-5853

In Canada (800) 36-FLUKE

From other countries +1 (425) 446-5500

[www.fluke.com](http://www.fluke.com)

©2025 Fluke Corporation.

Specifications subject to change without notice.  
07/2025

**Modification of this document is not permitted  
without written permission from Fluke  
Corporation.**